





Type CLM specification: 10-22m3

- Frame fully reinforced according to SS3021 (UNP200), DIN30722/SFS4417 (INP180)
- Bended sides 4mm or 5mm S355 or Strenx 700
- Bottom 5mm or 6mm S355 or Strenx 700
- Full height front frame RHS160x80x5
- No bottom profiles, support reinforcement 4pcs
- Back beam 6mm S355
- Top and back profiles 6mm S355
- Double side opening rear doors with 2 hinges with grease nipple on each hinge
- Hook-type locking mechanism (other types of locking mechanism are available on demand)
- Safety lock operated from the side
- Galvanized ladder on front wall
- Reflex decals
- Surface treatment:
 - shot blasting sa 2.5
 - inside 60µm alkyd primer
 - outside min 120µm 2K polyurethane EN ISO 12944 C3M

Options:

- D – combined top and side opening door with flap, hydraulic or pneumatic
- HD – hydraulic opening top hinged door
- HD2 – hydraulic opening top hinged door with double swing doors
- HDD – hydraulic opening top hinged door with flap
- G – combined top and side opening door with manual lock
- GD – top hinged opening with double swing doors
- Fliptop roof solutions www.fliptop.se
- Steel plates on sides for logo stickers
- LOGO stickers and serial numbers
- Ladders on sides in back




Other extras are available on demand.

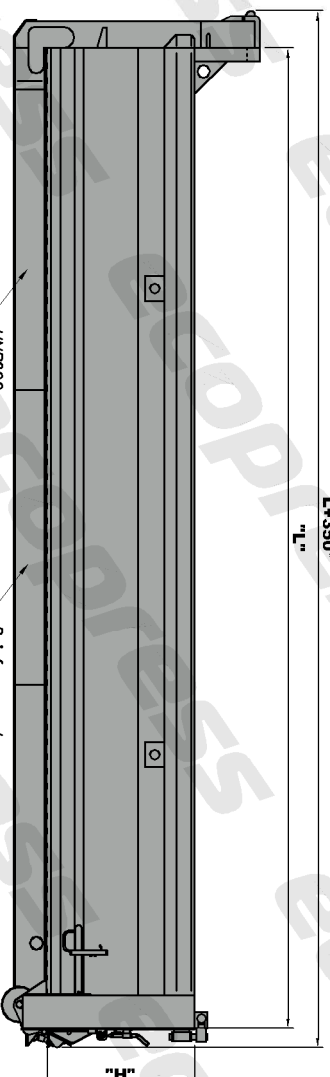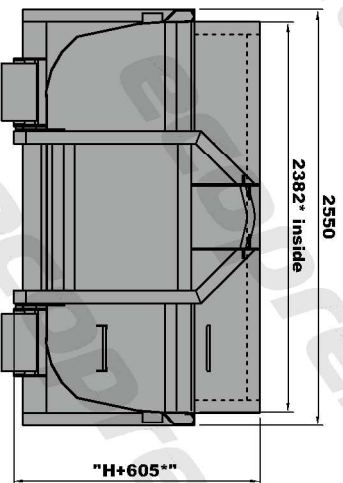

CLM12/6000D
Combined top and side opening door
with pneumatic/hydraulic flap locking

CLM12/6000G
Combined top and side opening door
with manual locking




CLM12/6000GD
Double door with top hinge opening
and manual locking

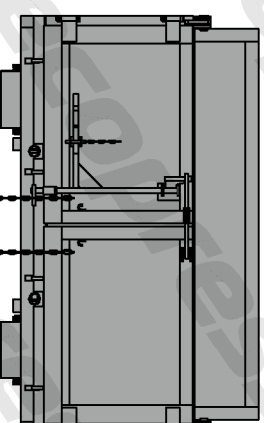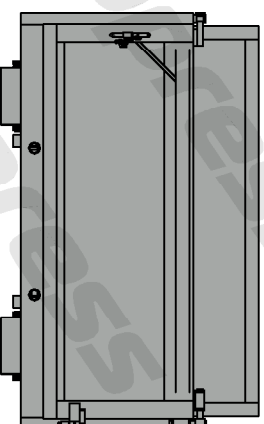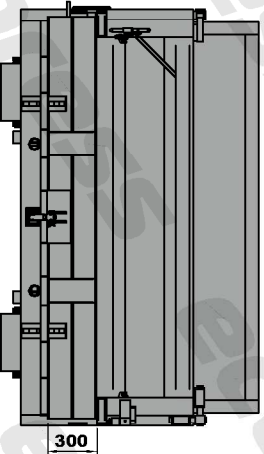

CLM12/6000HD
Hydraulic opening top hinged door

CLM12/6000HDD
Hydraulic opening top hinged door
with flap locking

CLM12/6000HDD2
Top hinged frame with hydraulic
opening double door and manual locking

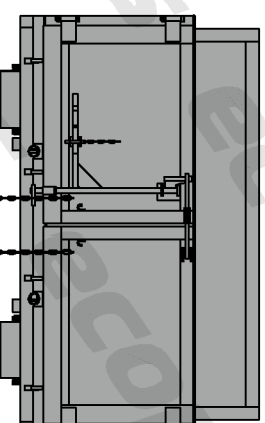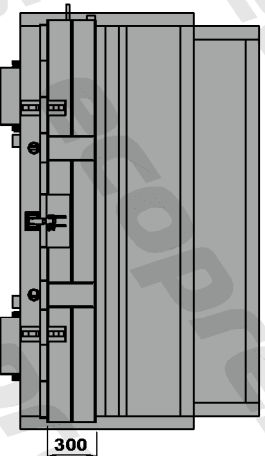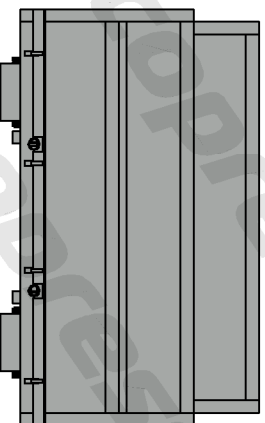

Model CLM		
Type	H, mm	V, m ³
CLM10/6000	700	9.5
CLM11/6000	800	10.8
CLM12/6000	900	12.2
CLM14/6000	1000	13.6
CLM16/6000	1100	15.1
CLM17/6000	1200	16.5
CLM18/6000	1300	17.9
CLM20/6000	1400	19.3
CLM22/6000	1500	21.0

Length:
4000mm / 4200mm / 4500mm
5000mm / 5200mm / 5400mm / 5600mm / 5700mm / 5800mm
6000mm / 6100mm / 6200mm / 6500mm

Frame: SS3021 / SFS4417 / DIN30722
Sides: 3mm/4mm/5mm S355
Bottom: 4mm/5mm/6mm S355