





Type MF20R900 specification:



- Lifting capacity 18 tons, max allowed 20 tons
- Frame reinforced according to SS3021 (UNP180), DIN30722/SFS4417 (INP180)
- Full reinforced front frame UNP180
- UNP100 cross profiles
- UNP180 sides
- Floor 4mm corrugated sheet S355
- Detachable ramps 935mm long 2 units
- Surface treatment:
 - shot blasting sa 2.5
 - outside min 120µm 2K polyurethane EN ISO 12944 C3M

Options:

- Wood 120 x 45 between cross reinforcements
- Wood floor 120 x 45 on both sides of main frame
- Front tool box both sides
- Lashing belt/chains holding bar
- 12pcs Ø63 sleeves
- Iron posts 600mm
- ALU posts 600mm
- Extra detachable ramp 935mm long
- Cross ladders for posts
- 4pcs Laxo tubes front and back for 20FT ISO container transport

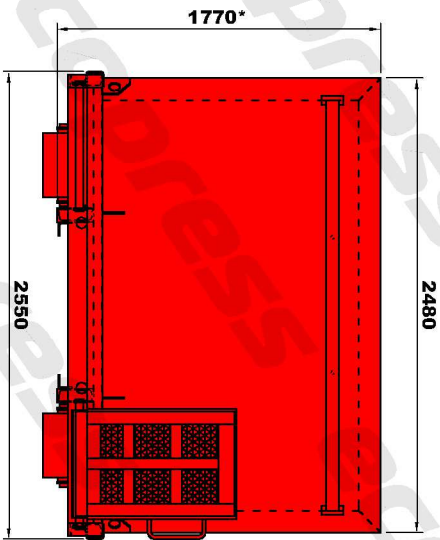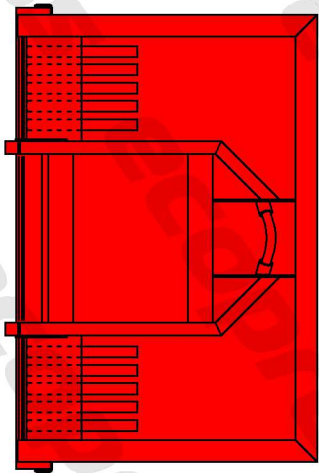

Additional options:
Sleeves for posts in middle - 3pcs
Posts - 10pcs
Wooden floor

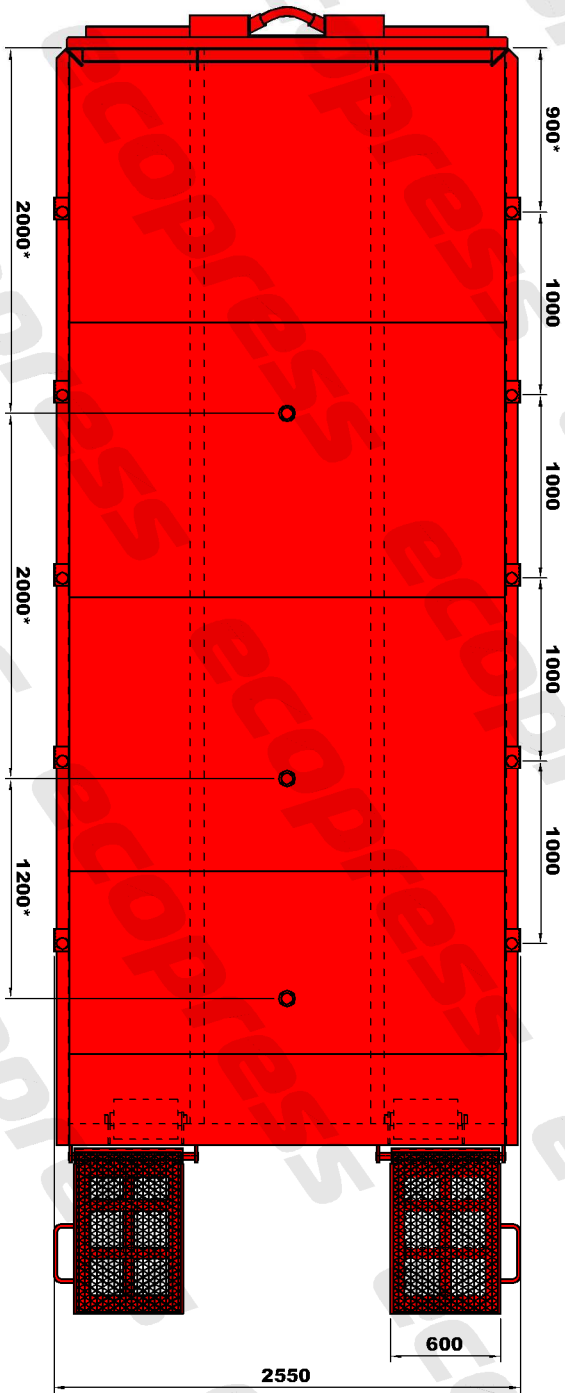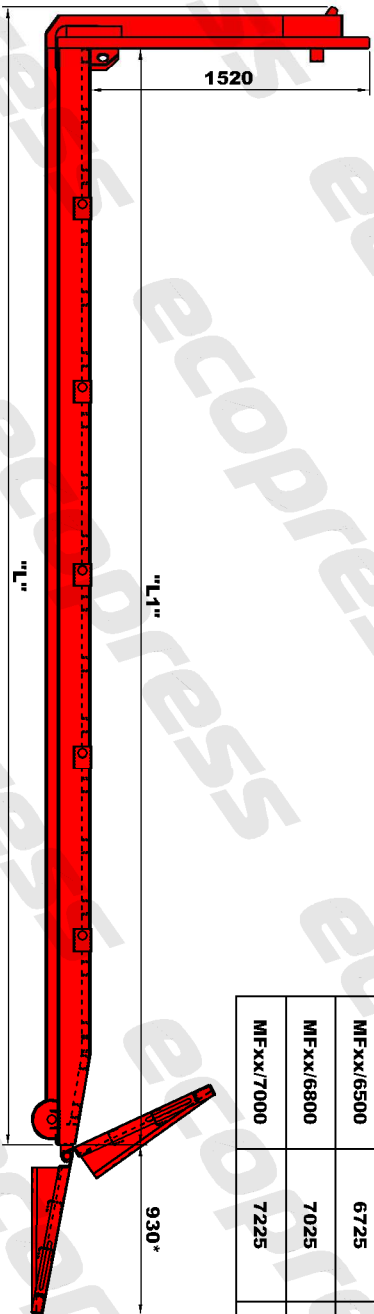

Hooklift platform 16T/18T		
Name	L, mm	L1, mm
MFxx/5600	5825	5600
MFxx/5800	6025	5800
MFxx/6000	6225	6000
MFxx/6300	6525	6300
MFxx/6500	6725	6500
MFxx/6800	7025	6800
MFxx/7000	7225	7000

Frame: SS3021 / SFS4417 / DIN30722
Front wall 3mm S235
Bottom tear plate 4mm S235