



Type RX specification: 10-25m³

- Frame fully reinforced according to SS3021 (UNP200), DIN30722/SFS4417 (INP180)
- Bended in middle sides 4mm Hardox 450 or 3mm Hardox 500TUF
- Bottom 6mm Hardox 450 or 5mm Hardox 500TUF, 2000mm wide
- Full reinforced front frame UNP180
- Bottom frame profiles, support reinforcement 4pcs
- Back beam 8mm S700
- Top and back profiles 6mm S700
- Front lashing hooks behind front frame 2pcs, front corner lashing hooks 2 pcs
- Side wall lashing hooks 2t, 2pcs each side in the middle, 1 hook in back post
- Galvanized ladder on front wall and driver side
- Reflex decals
- Surface treatment:
 - shot blasting sa 2.5
 - inside 60µm alkyd primer
 - outside min 120µm 2K polyurethane EN ISO 12944 C3M


Options:

- D - combined top and side opening door with flap, hydraulic or pneumatic
- HD – hydraulic opening top hinged door
- HD2 - hydraulic opening top hinged door with double swing doors
- HDD - hydraulic opening top hinged door with flap
- G - combined top and side opening door with manual lock
- GD -top hinged opening with double swing doors
- Fliptop roof solutions www.fliptop.se
- Steel plates on sides for logo stickers
- LOGO stickers and serial numbers
- Ladders on sides in back

Other extras are available on demand.



ecopress
Waste Systems

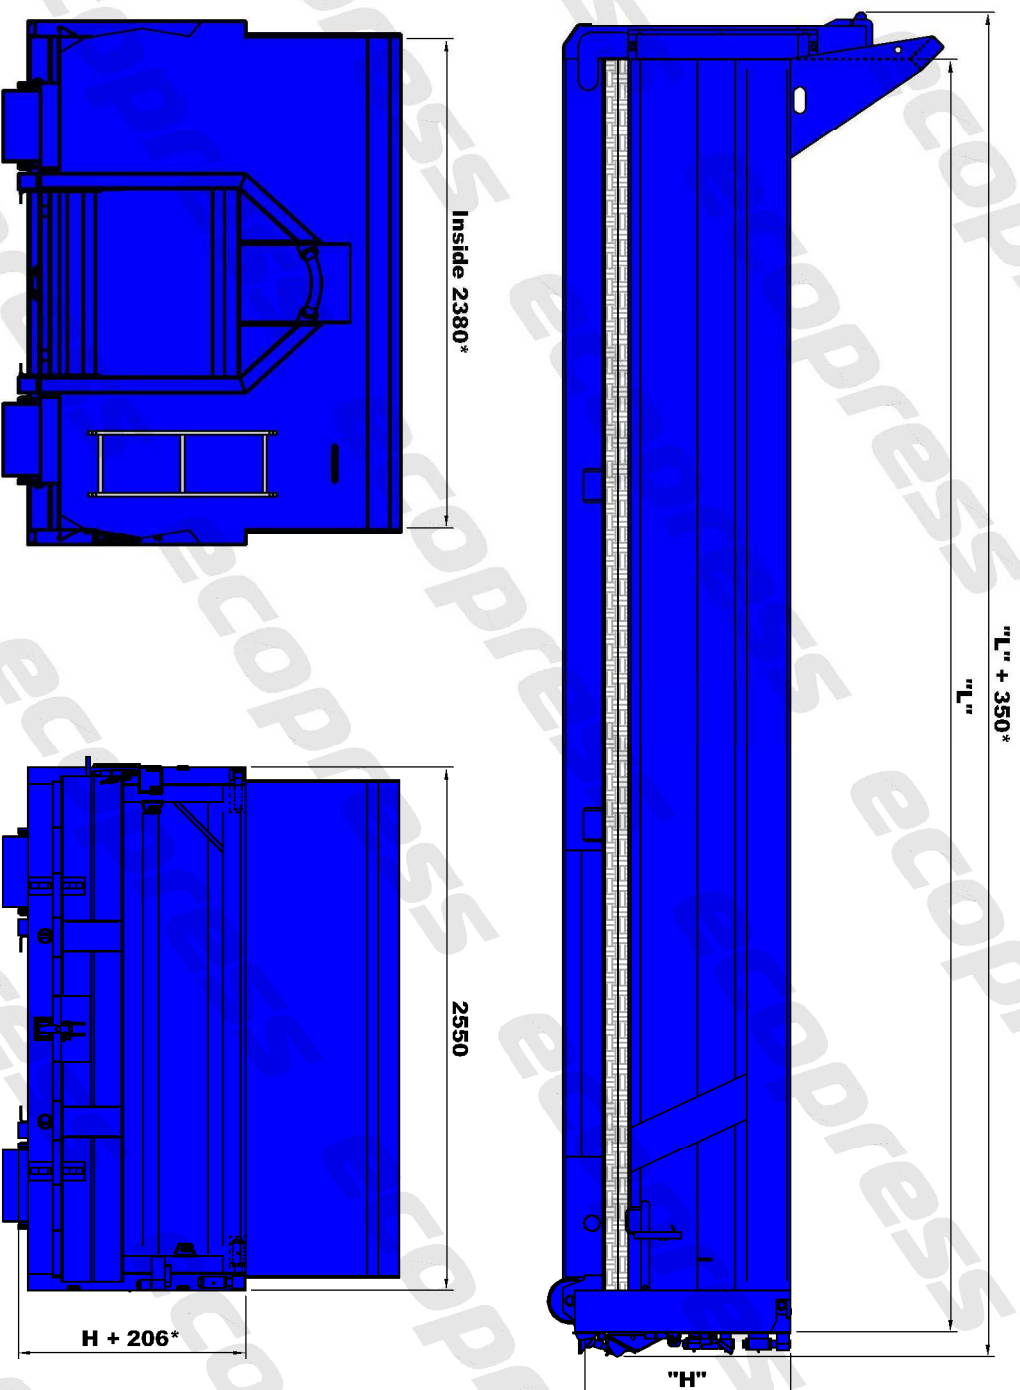

Model RX

Type	H, mm	V, m ³
RX11/6000D	800	11.5
RX12/6000D	900	13.0
RX14/6000D	1000	14.0
RX16/6000D	1100	16.0
RX18/6000D	1250	18.0
RX20/6000D	1400	20.0
RX22/6000D	1500	22.0
RX25/6000D	1750	25.0

Length:
4000mm / 4200mm / 4500mm
5000mm / 5200mm / 5400mm / 5600mm / 5700mm / 5800mm
6000mm / 6100mm / 6200mm / 6500mm

Frame: SS3021 / SFS4417 / DIN30722
Sides: 4mm/6mm Hardox450
Bottom: 6mm/8mm Hardox450