




Type CLS specification:

- Frame fully reinforced according to SS3021 (UNP200), DIN30722/SFS4417 (INP180)
- Rounded sides 3mm S355 (Hardox 450/Strenx 700 are available on demand as well 4mm/5mm thickness)
- Bottom 5mm S355 (Hardox 450/Strenx 700 are available on demand as well 3mm/5mm thickness)
- Full height front frame RHS160x80x5
- No bottom profiles, support reinforcement 4pcs
- Back beam 8mm Strenx 700
- Top rail profile 200x80x8mm Strenx 700
- Double side opening rear doors with 3, 4 or 5 hinges with grease nipple on each hinge with 12mm plates
- Hook-type locking mechanism (other types of locking mechanism are available on demand)
- Safety lock operated from the side
- Galvanized ladder on front wall
- Reflex decals
- Surface treatment:
 - shot blasting sa 2.5
 - inside 60µm alkyd primer
 - outside min 120µm 2K polyurethane EN ISO 12944 C3M

Options:

- Rolling tarpaulin cover
- Steel flat roof
- Steel arched roof
- Steel net roof (steel grid)
- Steel twin-sided roof
- Manual light mesh cover 270 degrees opening
- Sliding steel roof
- Fliptop roof solutions www.fliptop.se
- Cable winch for operation of roof
- Hydraulic manual pump
- Hydraulic combined pump (to operate with a drill)
- Lifting jack
- Steel plates on sides for logo stickers
- LOGO stickers and serial numbers
- Ladders on sides in back

Other extras are available on demand.

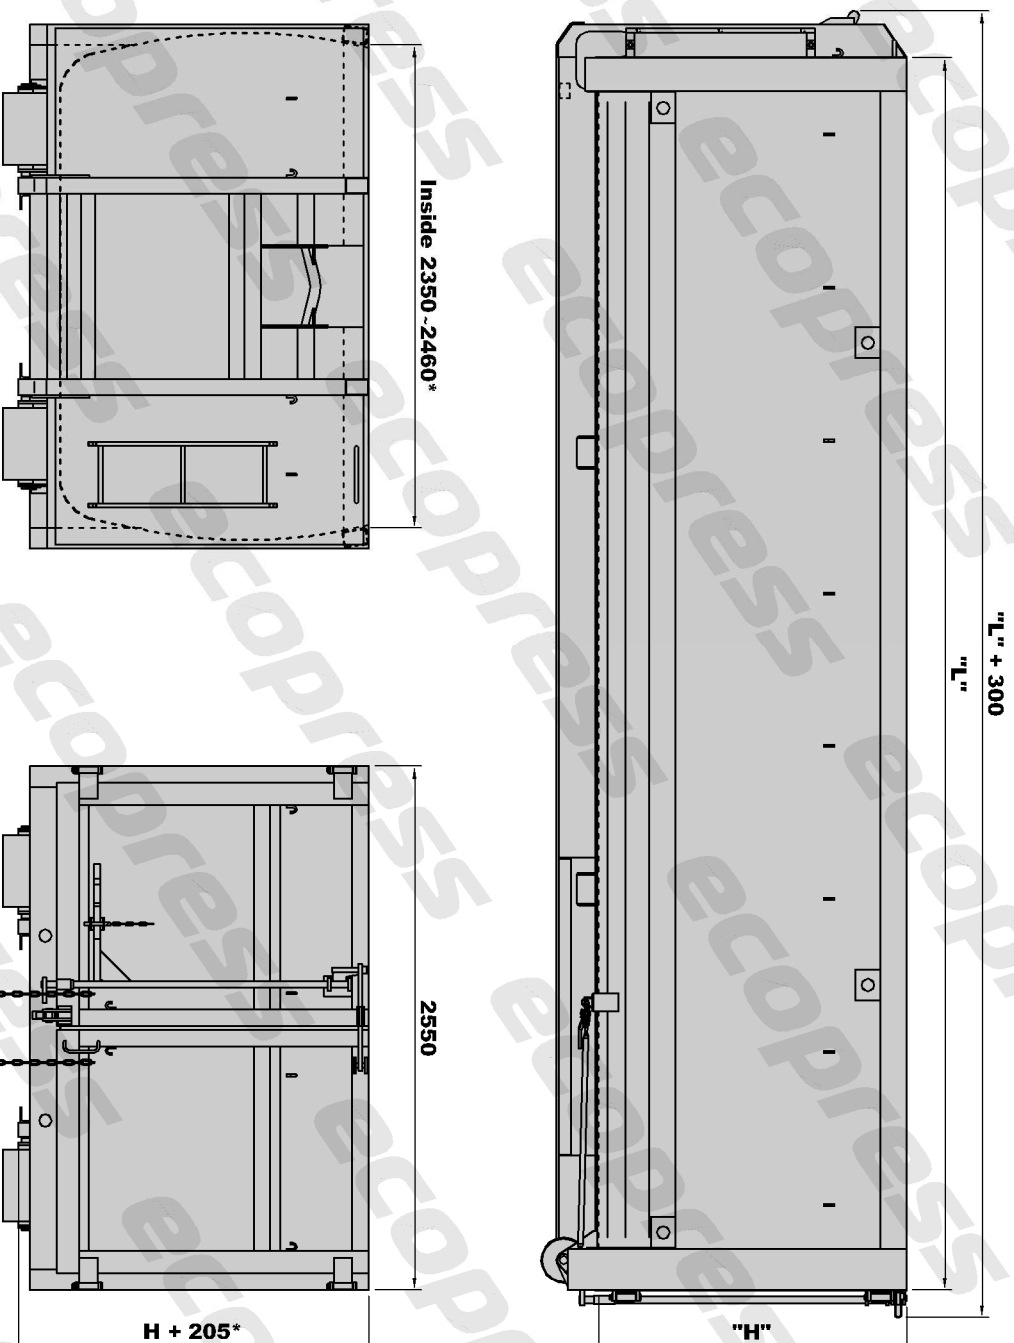

Model CLS		
Type	H, mm	V, m ³
CLS17	1200	16.9
CLS18	1250	17.6
CLS20	1400	19.7
CLS22	1500	21.3
CLS23	1600	22.6
CLS24	1700	24.0
CLS26	1800	25.4
CLS27	1900	26.8
CLS28	2000	28.2
CLS30	2100	29.6
CLS31	2200	31.0
CLS33	2300	32.5
CLS34	2400	33.9
CLS36	2500	35.3
CLS37	2600	36.7
CLS39	2700	38.2
CLS40	2800	39.6
CLS41	2900	41.0

Length from 4000mm to 7500mm each 100mm (4000, 4100, 4200, etc)
 Locking device: Swedish lock / German lock / 7-lock

Frame: SS3021 / SFS4417 / DIN30722
 Sides: 2mm/3mm/4mm S235/S355/Hardox450
 Bottom: 3mm/4mm/5mm S235/S355/Hardox450