



**Type HLR specification:**

- Frame according to SS3021 (UNP180), DIN30722/SFS4417 (INP180)
- Sides 3mm S235 (S355 is available on demand as well 4mm/5mm thickness)
- Bottom 5mm S235 (S355 is available on demand as well 4mm/6mm thickness)
- 19 bottom and 10 side profiles
- Side profiles 80x100x80x3
- Bottom profiles 40x100x40x4
- On top RHS160x80x5, back posts RHS160x80x5
- Double side opening rear doors with 2, 3 or 4 hinges with grease nipple on each hinge
- Hook-type locking mechanism (other types of locking mechanism are available on demand)
- Safety lock operated from the side
- Ladder steps on front wall and inside
- Reflex decals
- Surface treatment:
  - shot blasting sa 2.5
  - inside 60µm alkyd primer
  - outside min 100µm 2K polyurethane EN ISO 12944 C3M


**Options:**

- Rolling tarpaulin cover
- Steel flat roof
- Steel arched roof
- Steel net roof (steel grid)
- Steel twin-sided roof
- Manual light mesh cover 270 degrees opening
- Cable winch for operation of roof
- Hydraulic manual pump
- Hydraulic combined pump (to operate with a drill)
- Lifting jack
- Steel plates on sides for logo stickers
- LOGO stickers and serial numbers
- Ladders on sides in back

Other extras are available on demand.



**ecopress**  
Waste Systems

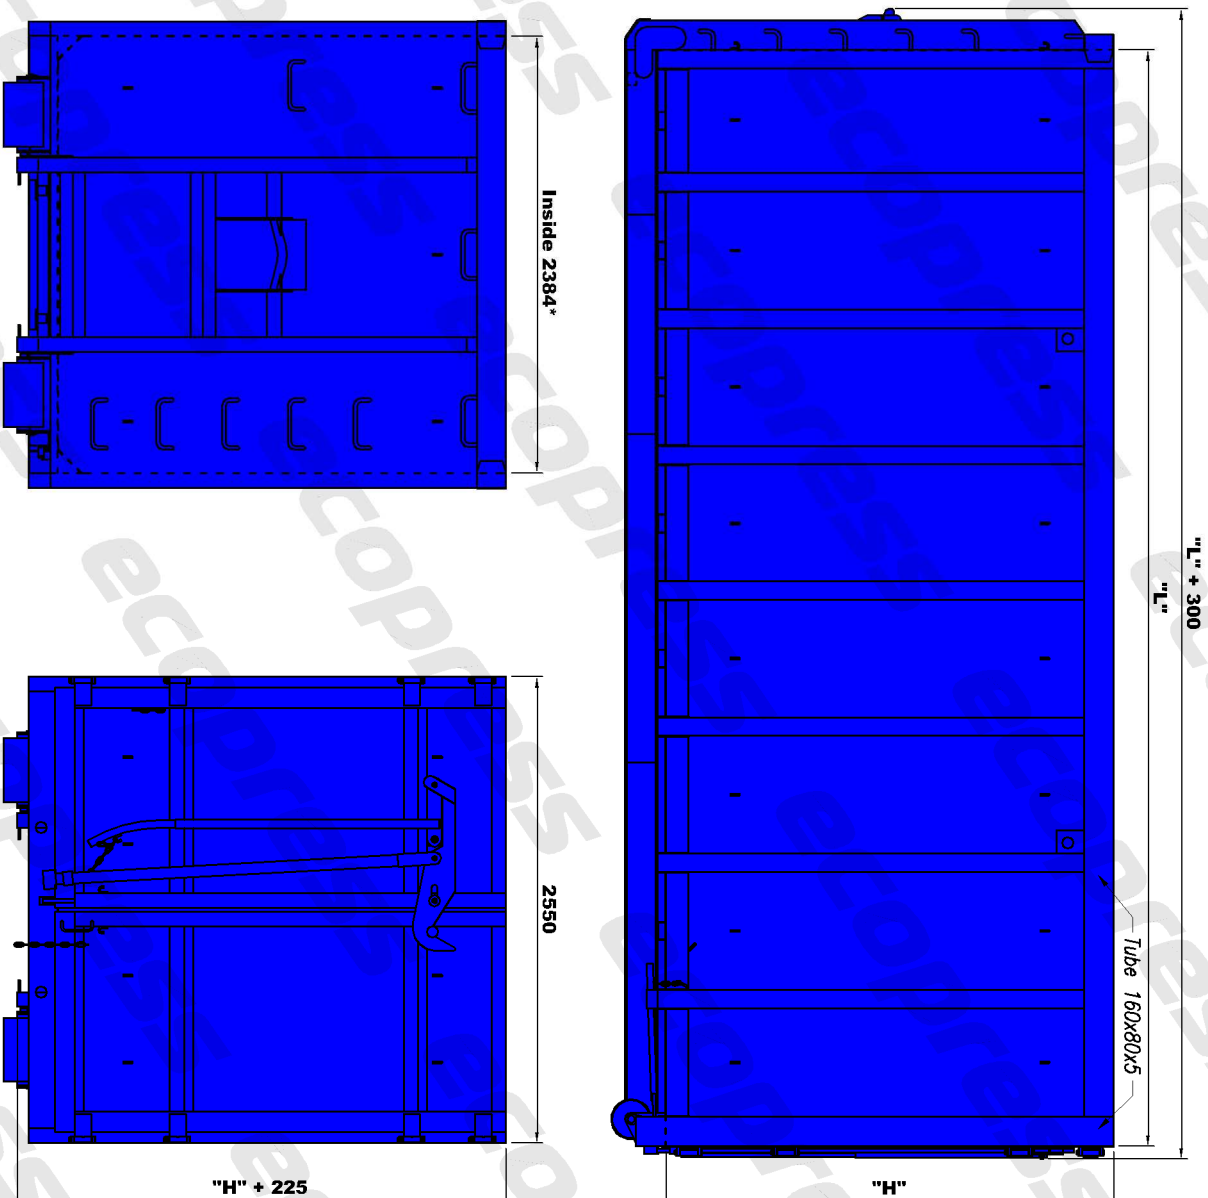

### Model HLR

Type	H, mm	V, m <sup>3</sup>
HLR10	700	9.9
HLR11	800	11.3
HLR12	900	12.7
HLR14	1000	14.1
HLR15	1050	14.8
HLR17	1200	17.0
HLR18	1250	17.7
HLR20	1400	19.8
HLR22	1500	21.2
HLR25	1750	24.8
HLR28	2000	28.3
HLR30	2100	29.7
HLR32	2300	32.5
HLR35	2450	34.7
HLR38	2650	37.5
HLR40	2800	39.7
HLR41	2900	41.1

Length from 6000mm to 7500mm each 100mm (6000, 6100, 6200, etc)

Locking device: Swedish lock / German lock / 7-lock

Frame: SS3021 / SFS4417 / DIN30722

Sides: 3mm/4mm/5mm S235/S355

Bottom: 4mm/5mm/6mm S235/S355